
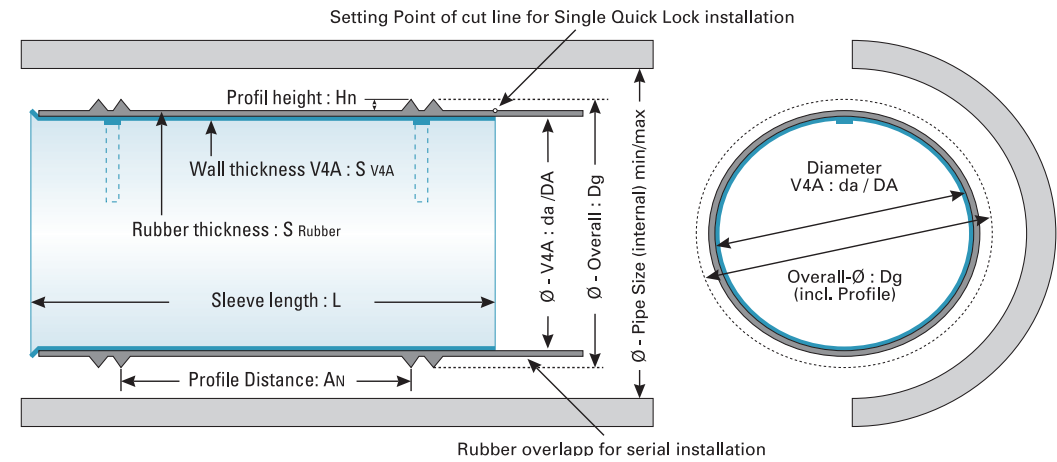


# Technical data sheet

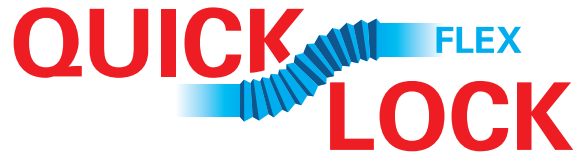

Quick-Lock sleeve DN	Rubber jacket DN	Sleeve length	Total diameter rolled	Suitable for pipes from / to		Packer	Wheelbase	Stainless steel sleeve			Rubber jacket		
				Pipe ID min.	Pipe ID max.			Wall thickness	V4A pipe rolled da	Max. expanded diameter DA	Rubber thickness	Height of seals	Rubber thickness incl. Height of seals
mm	mm	mm	mm	mm	mm	VP	RS	mm	mm	mm	mm	mm	mm
Designation:	Desig.	L	Dg	DN min	DN max			S V4A	da	DA	S Rubber	Hn	
200	200	360	172	196	207	VP 150-200 / VP 200-300	RS 200 / RS 200	1.2	159	202	2	5	7
250	250	360	212	247	261	VP 200-300 / VP 250-300	RS 250 / RS 250	1.2	199	252	2	6	8
300	300	360	255	293	313	VP 200-300 / VP 250-300	RS 250+SPV 300 / RS 300	1.2	238	305	2	7	9
400	400	360	349	390	415	VP 350-500	RS 400	1.5	330	406	2	8	10
500	500	460	446	487	515	VP 350-500 / VP 500-600	RS 400+SPV 500 / RS 500	2	428	505	2	8	10
600	600	460	538	582	617	VP 500-600 / VP 600-700	RS 500+SPV 600 / RS 600	2	519	607	2.5	8	10,5